



# Case Former **CF-25**

## High Performance - Case Erecting/Forming

The CF-25 is the latest in a series of industrial grade, high performance case erectors from Little David®. This case erector is designed to form and bottom-seal corrugated boxes at speeds up to 15 cases per minute.

Little David® delivers high-performance packaging equipment.

Little David® CF-25



### Performance and Design Features:

- ▣ **Small Footprint-** Patented case flow technology allows the CF-25 to maintain it's versatility without compromising your floors pace.
- ▣ **Chain and Lug Drive-** Chain and Lug drive system ensures a square box is formed and eliminates box stalling and slipping seen in side-belt machines .
- ▣ **Reliable Case Transfer-**Improved case transfer system features upgraded vacuum system and (3) vacuum cups
- ▣ **Quick/Easy Changeover-** Load-on-the-fly/easy load hopper ensure box loading and changeover are simple and efficient.


# CF-25

The Little David<sup>®</sup> CF-25 is an automatic system that erects and bottom seals corrugated cases at speeds from 10 to 15 cases per minute. The CF-25 case erecting solution is ideal for applications that require more throughput than manual case erecting can provide. This versatile system creates instant labor savings and increases production for a wide range of medium-speed applications.


## Little David<sup>®</sup> Performance and Design Features:

- Erects and bottom seals up to 10 cpm (standard) and 15 cpm (high speed)
- Patented box flow process enables small footprint
- 2 minute case size changeover; requires no tools
- Chain and lug drive system ensures case is square during sealing and eliminates slipping and stalling seen in side-belt machines
- Interlocking safety gates restrict access to moving parts
- 150 case powered hopper
- Pneumatically folds flaps

### Chain and Lug Drive System:

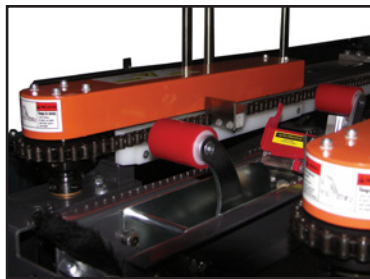

## Machine Dimensions:

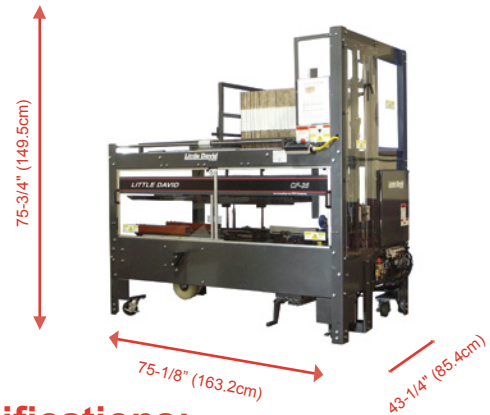

## Specifications:

**Power Requirements:** 110 volts, 60 cycle, single phase

**Air Requirements:** 14 SCFM @ 85 psi

**Production Speed:** Standard: Up to 10 cases per minute. High Speed Option: Up to 15 cases per minute, depending on case size and corrugated quality.

**Closure Material:** Pressure Sensitive Tape

**Weight:** 1100 lbs. (258 kg.), uncrated

### Case Capacity:

Length: 6" - 16"

Width: 6" - 14"

Height: 4" - 12"

## Options of the CF-25:

- |                       |                          |
|-----------------------|--------------------------|
| ■ Casters             | ■ Spare Parts Kit        |
| ■ Box Jam Warning     | ■ Stainless Steel        |
| ■ Low Tape Warning    | ■ Avail. in CE, NEMA 4   |
| ■ Leg Extensions      | ■ Leveling Pads          |
| ■ Low Hopper Warning  | ■ Air Dryer              |
| ■ Tape Detection      | ■ Mobile Control Station |
| ■ Special Electronics | ■ High Speed Upgrade     |

**LOVESHAW**

2206 Easton Turnpike  
P.O. Box 83  
South Canaan, PA 18459  
Tel: (800) 572-3434 Fax: (570) 937-3229  
www.loveshaw.com

**LOVESHAW Europe**

Unit 9 1 Newton Park,  
West Portway Industrial Estate  
Andover, Hampshire England SP 10 3 SH  
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, 2010