

MSBFT

Semi Automatic Uniform Bottom Carton Sealer

The BestPack MSBFT Series is a uniform operator-fed, bottom carton sealer designed to reduce operator time and fatigue when folding & sealing the bottom flaps of a carton. Another advantage of using the MSBFT compared to hand taping, the quality of the seal and the appearance of the carton is greatly improved. This unit many times is used when carton-forming volume has become too large to manually form and tape the cartons completely by hand, but the volume is too small to justify a fully automatic carton erector/sealer.

Our MSBFT line incorporates our exclusive pop-out pressure-sensitive "High Speed" tape head with BestPack's patented tab adjustment. All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.



ERECTOR PROCESS

The carton erector has two stations. The first station folds the bottom flaps of the carton and the second station seals the bottom flaps and feeds the carton automatically on to a conveyor.

Key Points of the Carton Sealer



Operator Fed



Uniform Cartons



Bottom Seal


Features

- Heavy Duty Frame
- Uniform Bottom Flap Folder/Bottom Sealer
- Extended Belt Drive for Positive Carton Feed
- Stainless Steel "T" rail for Durability and Minimal Carton Friction as the Carton is Formed
- Operator can Work from Either Side of the Carton Sealer
- Adjustable Bed Height from 23.5" to 30.0"
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- UL Approved Electrical Parts
- Capable of Interchanging 2" or 3" Tape Heads

Options

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Food Grade 304 Stainless Steel
- Locking Casters w/ Support Brackets
- Long Exit Conveyor

Extra Accessories to Improve Efficiency

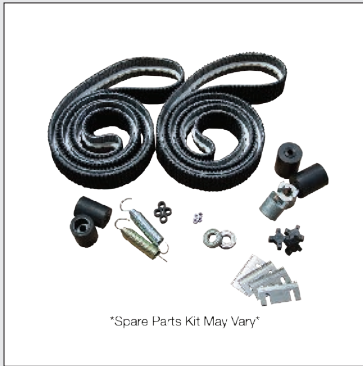

Spare Parts Kit



Locking Casters
w/ Support Brackets



Long Exit Conveyor
w/ L-Bracket Holder/Stopper



Spare Tape Head

- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Carton Sealing Tape

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 15 Cartons/min.
Speed

None
Air Requirements

350 lbs
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range* Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
MSBFT20-2 2" Tape Head	(99.6") x (28.4") x (29.4")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0"+)	(23.5" - 30.0")	Up to 15	350
MSBFT20-3 3" Tape Head	(99.6") x (28.4") x (29.4")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0"+)	(23.5" - 30.0")	Up to 15	350

Information subject to change without notice.

* Outside Dimensions Only
All Models available in High Speed & Food Grade 304 Stainless Steel