

ServoFlex[™] Series

Horizontal Wrapper

Innovative Design Incorporates Servo Technology for the Ultimate Performance and Flexibility



ServoFlex modular shown

Conflex®. Flexible People make Flexible Systems.

Engineered for maximum flexibility, reliability and performance. Conflex shrink packaging equipment incorporates leading-edge Servo technology into designs that can take on the toughest shrink packaging challenges.

Speed and Versatility in One Durable Machine

The Conflex ServoFlex™ Series Horizontal Form Fill and Seal Wrapper with leading-edge servo technology offers blazing speeds of up to 100 feet of film per minute, precision lap sealing capability, and the ultimate in packaging flexibility. The ServoFlex Series integrates seamlessly into existing lines, is easy to operate, and features hand-wheel adjustable controls and electronic eye sensors for maximum efficiency. Plus, its simple design and rugged heavy-duty steel construction ensure years of dependable use.

Conflex ServoFlex Series Features and Benefits

- **3 Axis servo package**—Minimizes moving parts and maximizes flexibility
- **Large 12" full color touch screen**—For ease of operation
- **Reciprocating, servo-controlled hot knife seal system**—Precision seal placement with fewer moving parts
- **Cradle style powered film feed**—Easy to load with fast change overs
- **Triple safety system**—Protects operators and promotes a safe work environment
- **Patented Self-centering/height-limiting seal bar**—Ensures excellent uniform shrinks; requires no tools to adjust and increases line speeds
- **Supports a wider range of applications**—Infinite length and 7-1/2" height capabilities
- **Multiple options**—Include adjustable height film former, thermal bottom seal, 5' and 10' infeed extensions, 440V operation, card style product guides


Conflex ServoFlex Series Specifications

Electrical Requirements	220V, 25A or 440V
Air Requirements	60 psi
Film Requirements	One roll, single wound
Seal Bar	16", 20" wide
Maximum Film Width	34", 38"
Maximum Roll Diameter	13"
Overall Machine Dimensions	109"L x 56"W x 62"H (includes infeed)
Gross Weight	1,800 lbs. (includes infeed)
Maximum Operating Speeds	100' film per minute
Deck Height	35.75"-37.75"
Package Dimensions*	3"L to Infinite L 2"W to 13-1/2"W** 1/8"H to 7-1/2"H

*May require additional components and set-up time to run the entire size range.

**Product dependent.

Conflex ServoFlex Series Plan View*

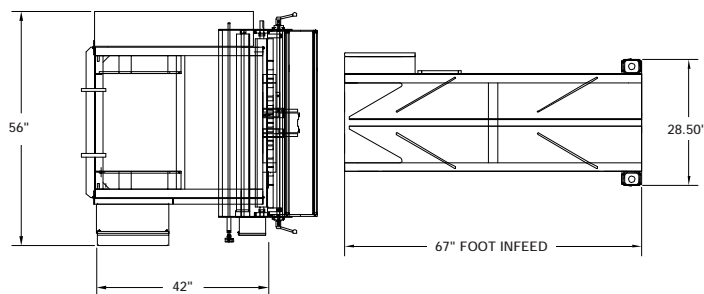

* Shown with 5' infeed.

The Conflex engineering department is available to customize options for various product applications.

Distributed by:



Conflex Incorporated
 Manufacturing Facility:
 W130 N 10751 Washington Drive
 Germantown, WI 53022
 Toll Free: 800-225-4296
 Fax: 262-255-4664
 E-mail: info@conflex.com
 www.conflex.com